

I.C.T Pneumatic Fixture Cleaning Machine I.C.T-5100



Introduction:

I.C.T-5100 Pneumatic Fixture Cleaning Machine is used to clean grease, flux, dusts on the surface of all kinds of SMT fixtures, tray, reflow oven cooler and filter, wave-soldering oven claw, chains, and nets...etc.

Features:

- 1.Total SUS 304 structure, resist Acid and Alkali corrosion, firm and attractive.
- 2.1 meter diameter big cleaning round basket, can clean 20~40 pcs fixtures at one time.
- 3.Only driven by compressed air,no use electric power at all.
- 4.Clean liquid pressure up to 6kg/cm2, make it throughly clean of whole fixture.
- 5.Easy One-button operation, high pressure clean+ rinse+ hot air dry, all process complete in a cycle automatically.
- 6.Clean liquid and water heat and temperature keeping function.
- 7.Standard equipped solution and water auto fill in and discharge function.
- 8.The fixtures are clean and dry after cleaning, standby and ready for use at any time.
- 9.Modular design, easy maintenance.

Material:



Diaphragm pump
USA—INGERSORAND




Cleaning Basket
Auto(Cleaning,Rinsing,Drying)



Pump
High pressure,high flow,electric



Effect:

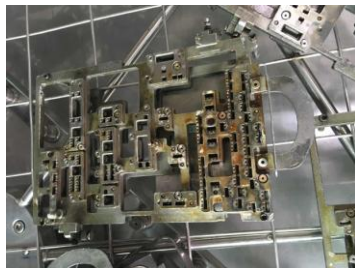

vs



Before cleaning

After cleaning

Specification:

Item	I.C.T-5100
Cleaning basket size	Φ1000mm x H 200mm. Special size option
Spray unit	Upper/lower/front side, 720° all-around spray
3-level filter system	1mm / 50um / 20um filters
Clean tank capacity	80L
Rinse tank capacity	80L

Clean spray pressure	2~4 kg/cm2
Clean time	5~15 Min
Rinse time	1~3 Min
Dry time	10~20Min
Air supply	0.5~0.7Mpa
Machine size	L1450 x W1500 x H 1400 (mm)
Machine weight	500KG

Customer:

Thanks for choosing I.C.T.
I.C.T looks forward to win-win cooperation.
Thank you.